


# Custom Honeycomb Core Doors

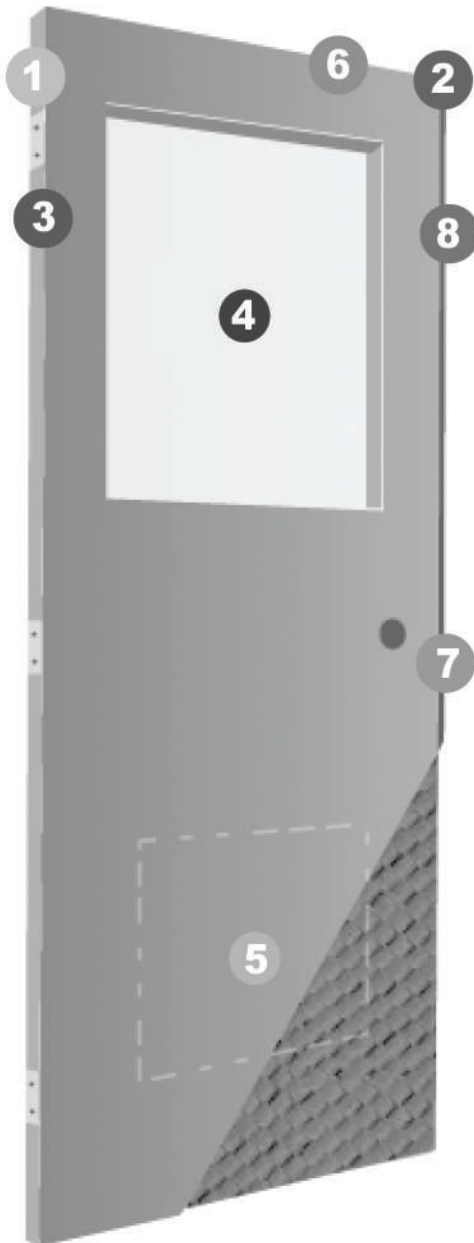

## Features

- 1 3/4" standard; also available in 1 3/8"
- **1** Any manufacturer's hinge locations. Blast resistant door requires Commercial Grade 1 lockset and commercial grade hinges (by others)
- 18-gauge A60 galvanized steel standard
- **2** Continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat ANSI/SDI 250.10
- **1** Standard 3070 door meets blast resistant GSA level C (4 psi); no additional charge.
- This door has passed the 10 million cycle test

## Material Options

- 16-gauge, 14-gauge and 12-gauge steel
- G90 galvanized steel
- Stainless steel available in 304 or 316 alloys
- Honeycomb core

## Feature Options

- **3** Up to 3 hour fire label
- **4** Integral lite option
- **5** Integral louver option
- **6** Flush top cap
- **7** Any manufacturer's Deadlock prep, Panic prep, and Mortise sectional trim
- **8** Flat bar astragal (pairs)

## Hardware Reinforcements

- 3/16" for hinges
- 12-gauge for locks standard
- 14-gauge for closers standard
- Heavier gauge reinforcements available
- **1** Commercial Grade 1 lockset and commercial grade hinges (by others) required for blast rating