


Custom Polystyrene Core Doors

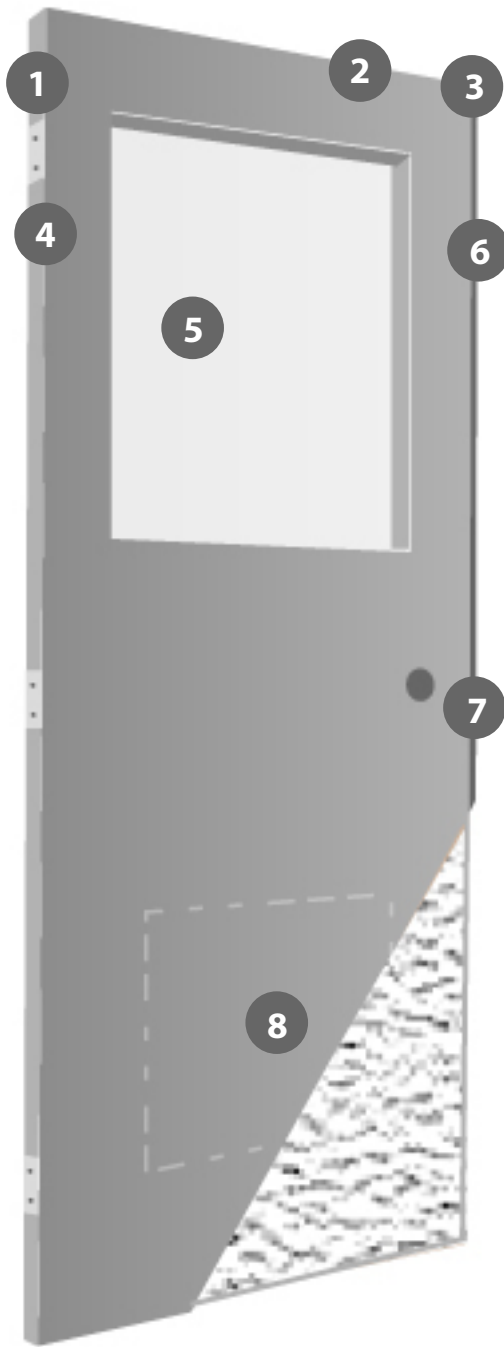

Features

- 1 ¾" standard; also available in 1 ⅜"
- ① Any manufacturer's hinge locations
- 18-gauge A60 galvanized steel standard
- ③ Continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat ANSI/SDI 250.10
- Also available as stock door

Material Options

- 16-gauge, 14-gauge and 12-gauge steel
- G90 galvanized steel
- Stainless steel, available in 304 or 316 alloys

Feature Options

- ④ Up to 3 hour fire label
- ⑤ Integral lite option
- ⑧ Integral louver option
- ② Flush top cap
- ⑦ Any manufacturer's Deadlock prep, Panic prep, and Mortise sectional trim
- ⑥ Flat bar astragal (pairs)

Hardware Reinforcements

- ⅜" for hinges
- 12-gauge for locks standard
- 14-gauge for closers standard
- Heavier gauge reinforcements available