


# Tornado Resistant Doors

## FEMA 361/ICC-500 Compliant

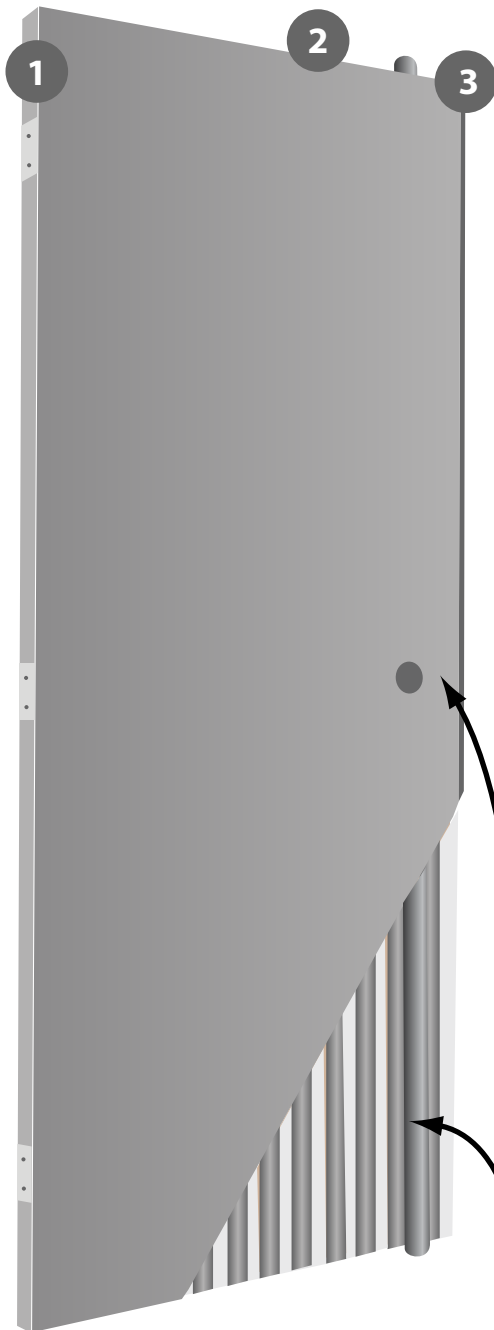

### Features

- 1 3/4" standard thicknesses
- **1** Any manufacturer's butt hinge
- 14-gauge steel A60 galvanized standard
- 12-gauge stiffeners spot-welded at 4" on center with fiberglass insulation
- **3** Continuously welded vertical edges (seamless) standard
- Rust inhibitive prime coat ANSI/SDI 250.10
- Available up to 4'x8' singles / 8'x8' pairs
- Singles available in-swing or out-swing

### Material Options

- G90 galvanized steel

### Feature Options

- **2** Flush top cap
- Must use with Securitech hardware

**Must have multi-point latching by Securitech (not provided by Door Components). May be surface or concealed in door.**