


**STANDARD SPECIFICATION**

**MATERIAL: GALVANNEAL**

**GAUGE: 16**

**UL 752 LEVELS 1 - 8 AVAILABLE**

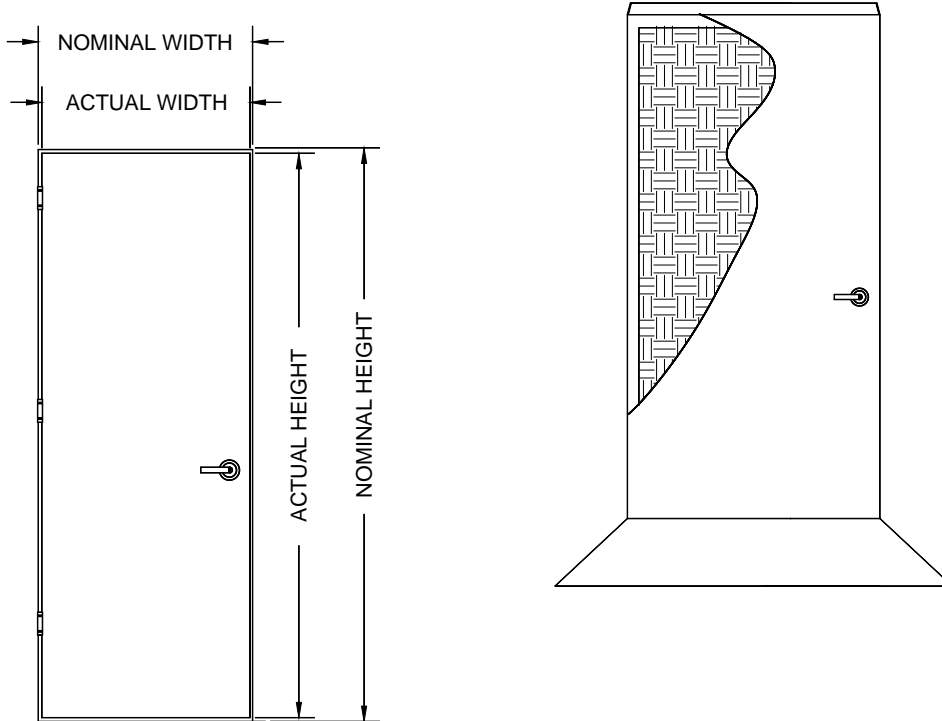

- 1.) 1-3/4" STANDARD DOOR THICKNESS.
- 2.) 14 GAUGE AVAILABLE.
- 3.) G90 GALVANIZED AVAILABLE. STAINLESS STEELS 304 AND 316 AVAILABLE IN #4-SATIN, #2B-MILL OR #8-MIRROR FINISHES.
- 4.) PROPRIETARY BULLET RESISTANT CORE.
- 5.) 18 GA FLUSH TOP AND BOTTOM CHANNELS WELDED TO FACE SHEETS.
- 6.) CONTINUOUS WELD SEAMLESS EDGE STANDARD.
- 7.) HARDWARE REINFORCEMENTS:
  - 3/16" FOR HINGES
  - 12 GA FOR LOCKS
  - 14 GA FOR CLOSER
- 8.) SIZES AVAILABLE UP TO 4'-0" x 8'-0" SINGLE SWING.
- 9.) LEVELS I - III
  - APPROXIMATELY 9 LBS/SQ FT
  - LITES AVAILABLE UP TO 100 SQ INCHES (GLASS BY OTHERS)
  - CYLINDRICAL LOCKS, MORTISE LOCKS, SURFACE MOUNTED AND MORTISE EXIT HARDWARE AVAILABLE
- 10.) LEVELS IV - VIII
  - APPROXIMATELY 22 LBS/SQ FT
  - FLUSH DOORS
  - CYLINDRICAL LOCKS OR SURFACE MOUNTED EXIT HARDWARE AVAILABLE

